


TV-SAT COMBINER/DFU8695 TV-UYDU BİRLEŞTİRİCİ

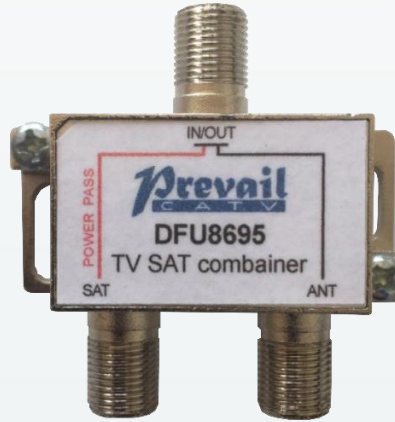

TV UYDU BİRLEŞTİRİCİ (TV-SAT COMBINER)			
	PORTLAR	Frekans Aralığı	Özellikler
Maximum Geçiş Kaybı -Insertion Loss dB	IN-ANT	15-860 Mhz	2,5 dB Max.
		950-2150 Mhz	30 dB Min.
	IN-SAT	15-860 Mhz	25 dB Min.
		950-2150 Mhz	2,5 dB Max.
Geri Dönüş Kaybı-Return Loss dB.	ANT	15-860 Mhz	10 dB Min.
	SAT	950-2150 Mhz	8 dB Min.
İzolasyon-Isolation dB.	ANT-SAT	15-860 Mhz	30 dB Min.
		950-2150 Mhz	30 dB Min.
Ekranlama Faktörü-Screening effectiveness EN 50083/2	5-300	85 dB.	
	300-470	80 dB.	
	470-950	75 dB.	
	950-1218	55 dB.	

Çalışma Frekans Aralığı- Frequency Range	15-2150 Mhz ANT (15-860) SAT (950-2150) Mhz
Empedans-Impedance	75 ohm
DC Blok-Blocking Capacitors (Low Band)-ANT	50 VDC
Konnektör-Connector	F-Female
Gövde-Housing	Min. 1.5 mm CuSn plated
İç İletken-Center conductor	Gold
Power Pasing-SAT	24 VDC min.- 1 Amper maks.