


HANSEN/RG6T-H 75 Ohm Connector

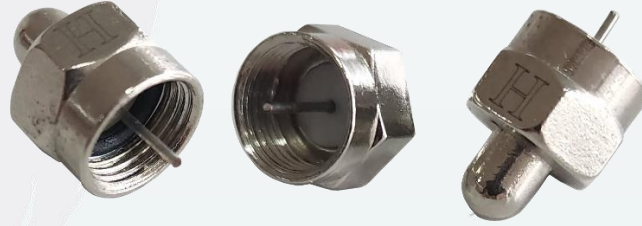

1. General Specification

For Cable	Hansen FSON-H
Main Body Material	Brass
O-ring	Ethylene Probylene (EPDM)
Plating	Nickel-Tin
Bandwidth	5 MHz to 1218 MHz
Connector Type	Screw type
Operational Environment	Indoor
Inner Conductor Plating	Nickel-Tin
Inner Conductor Material	Brass

2. Electrical Properties

Impedance	75 Ω	
Return Loss	5-1000 MHz	30 dB
	1000-1218 MHz	27 dB
Screening Attenuation	30-1000 MHz	≥ 110 dB
	1000-1218 MHz	≥ 100 dB